## PINOUT

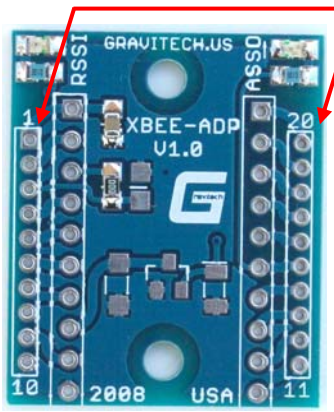


| | |
|---|---|
| 3V3/IN (1) | DIO0 (20) |
| DOUT (2) | DIO1 (19) |
| DIN (3) | DIO2 (18) |
| DIO12 (4) | DIO3 (17) |
| RESET (5) | RTS (16) |
| RSSI (6) | ASSOCIATE (15) |
| DIO11 (7) | VREF (14) |
| NC (8) | ON (13) |
| DTR (9) | CTS (12) |
| GND (10) | DIO4 (11) |

* See schematic for more detail.

# XBee-ADP3

***3.3V XBee adapter***

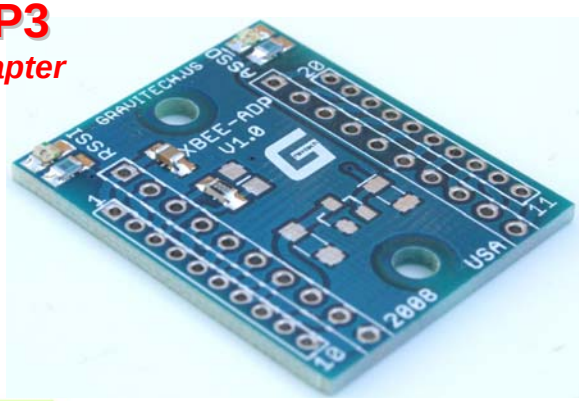

ravitech
electronic experimental solutions

Copyright © 2008 Gravitech
**WWW.GRAVITECH.US**

## DIMENSIONS

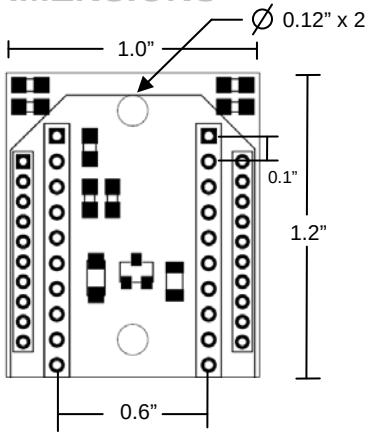


## FEATURES

- Works with all XBee modules including the Series 1, Series 2, and Series 2.5; standard and Pro.
- Included male header pins
- Accessibility to every Xbee pin
- Two mounting holes
- Compact size 1.0" x 1.2"
- 0.1" spacing (breadboard friendly)
- RSSI and ASSOCIATE LEDs

## DESCRIPTION

It is the most easiest and reliable way to connect the Xbee module to your favorite microcontroller. This is a 3.3V version, which mean it is for 3.3V logic microcontroller. If you have 5V microcontroller, use XBee-ADP5. There are two LEDs that can help you monitoring and quickly troubleshooting.

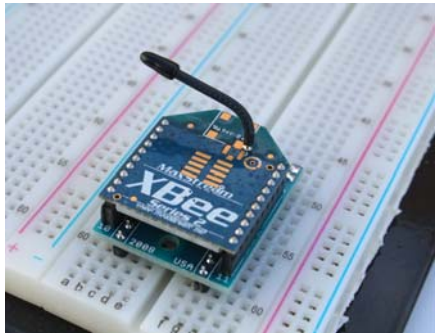

XBee and XBeePRO are Treadmarks of Digi International Inc.